




**Characteristics** (under normal operating condition at ambient temp. +35 °C)


<b>Model</b>	70ACU/003	
<b>Capacity (W.)</b>	2400	
<b>Installation type</b>	panel	
<b>Input</b>	single-phase (V.)	220V+20% / -15%
	frequency (Hz.)	50/60
	current (A.)	6
<b>Compressor</b>	hermetic type	rotary
	refrigerant type	r407c
<b>System operate</b>	direct expand	yes
<b>Hi-prosent ctrl1.</b>	thermostat	yes
	condensor thermal detector	yes
	anti-freeze detector	yes
	compressor overheat detector	none
	water detector	none
<b>Protection</b>	over drain protection system	yes
<b>Display</b>	thermometer (red 7 segment 19 mm.)	yes
	system status (2 colour LED)	yes
<b>Electrical equip.</b>	safety device	7A. slow-blow fuse
<b>Evaporator coil</b>	face area x rows	104 sq.inch x 2
	blower fan(r.p.m.)	1440
	number of blower fan x cfm	1 x 360
<b>Condenser coil</b>	face area x rows	171.875 sq.inch x 6
	centrifugal fan (r.p.m.)	2310
	number of centrifugal fan x cfm	1 x 710
<b>Physical data</b>	approx.weight (kgs.)	71.90
	dimension (mm)	W:465 D:210 H:1590
	condensate drain	OD. 1/2 inch
	internal casing	electro-galvanize
<b>Air filter</b>	width x lenth (mm)	305 x 285

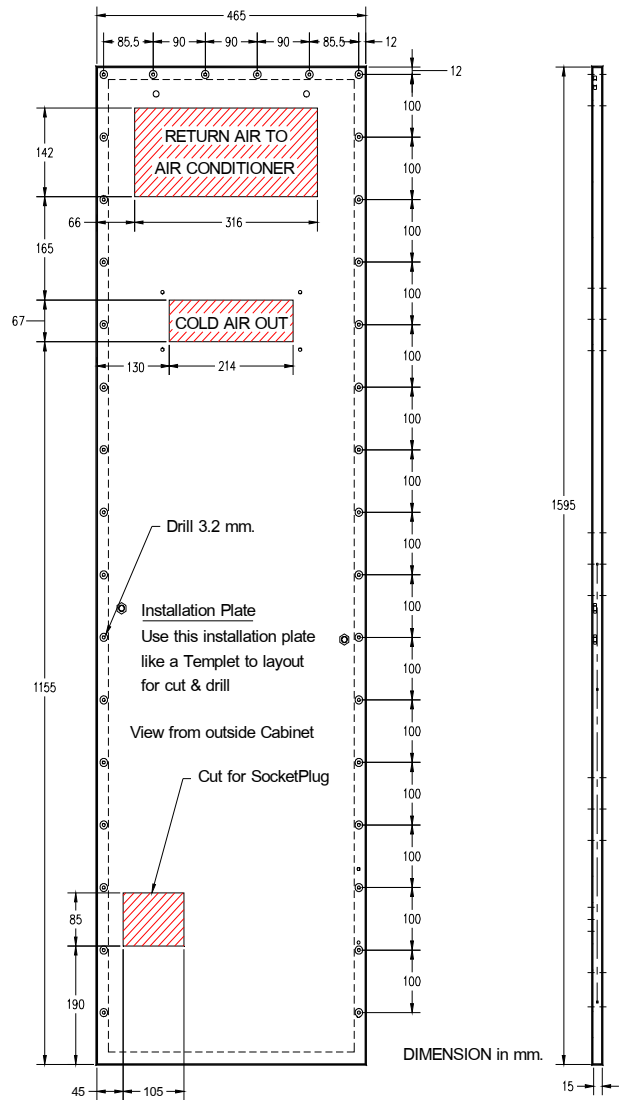

FRONT VIEW

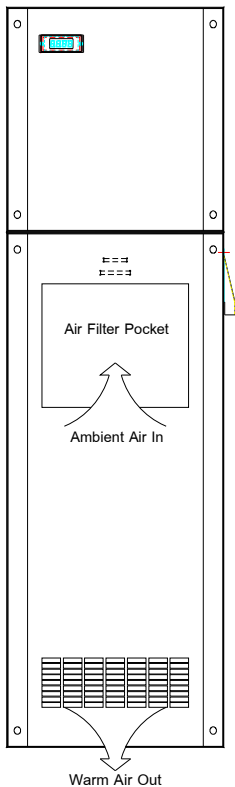

SIDE VIEW

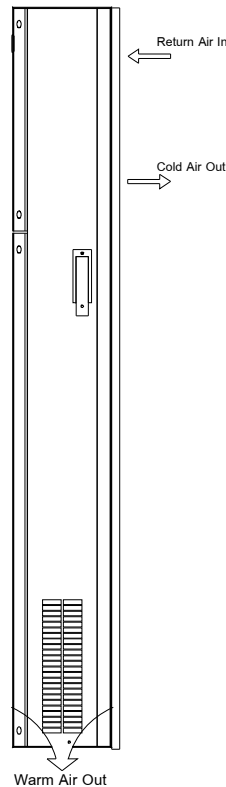

REAR VIEW

