




Characteristics (under normal operating condition at ambient temp. +35 °C)

Model	70ACU/005	
Capacity	Watt	2400
Installation type		panel
Input	single-phase (V.)	220V+20% / -15%
	frequency (Hz.)	50/60
	current (A.)	6
Compressor	hermetic type	rotary
	refrigerant type	r407c
System operate	Direct expand	yes
Hi-prosent ctrl1.	thermostat	yes
	condensor thermal detector	yes
	anti-freeze detector	none
	compressor overheat detector	none
	water detector	none
Protection	over drain protect system	yes
Display	thermometer (red 7 segment 19 mm.)	yes
	system status (2 colour LED)	yes
Electrical equip.	safety device	7A. slow-blow fuse
Evaporator coil	face area x rows	96 sq.inch x 3
	blower fan(r.p.m.)	1440
	number of blower fan x cfm	1 x 360
Condenser coil	face area x rows	172.5 sq.inch x 5
	centrifugal fan (r.p.m.)	2480
	number of centrifugal fan x cfm	1 x 710
Physical data	approx.weight (kgs.)	75.3
	dimension (mm.)	W:465 D:210 H:1600
	condensate drain	OD. 1/2 inch
	internal casing	electro-galvanize
Air filter	width x lenth (mm.)	305 x 285


Installation Plate & Templet for cutting Area
View From Outside of Cabinet

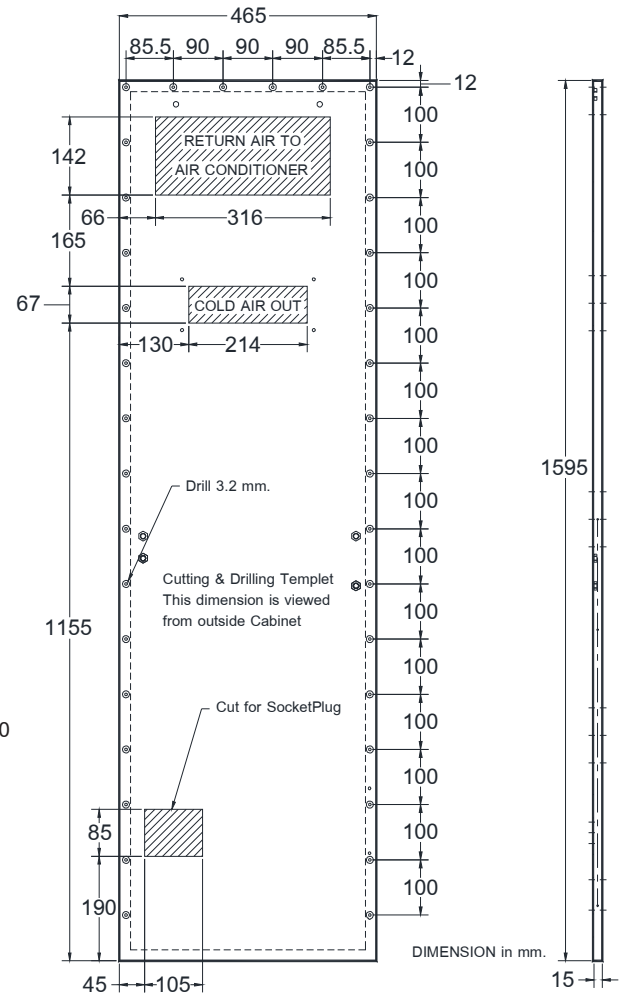


FRONT VIEW

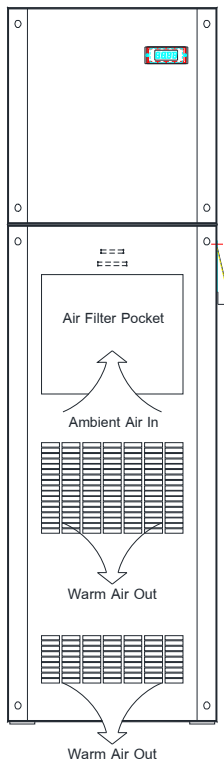

SIDE VIEW

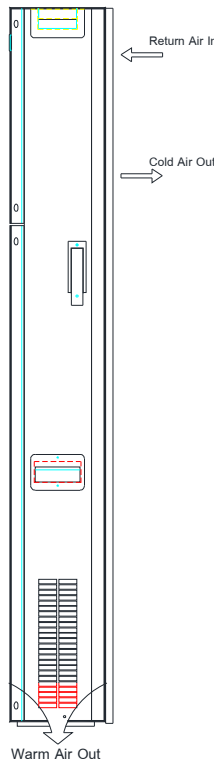

REAR VIEW

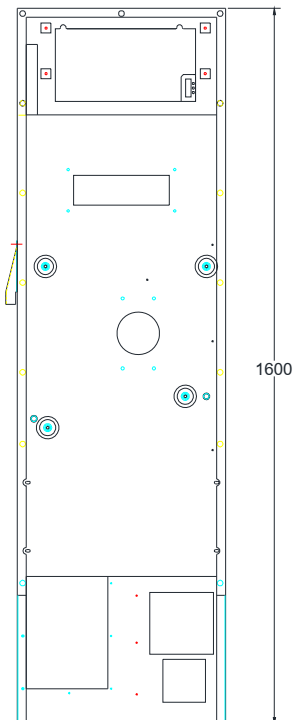

MODEL 70ACU/005

