


Characteristics


Model	E050-V2	
Water evaporation capacity	500 ml/h	
Allowable ambient temperature(°C)/humidity(%)	25-40/20-85	
Evaporation type	ultrasonic vibration element	5
Installation type	panel	
Input	single-phase (V.)	220V+20% / -15%
	frequency (Hz.)	50/60
	current (A.)	0.52
	power consumption (W.)	115
	power cord (M.)	2.0
Electrical equip.	safety device	2A fuse
Display	operating	green led
Physical data	approx.weight (kgs.)	9.7
	overall dimension (mm)	W:376 D:153 H:190
	drain inlet OD (mm.)	15 (5/8")
	vapor outlet OD (mm.)	25.4 (1")
	overdrain pipe outlet OD (mm.)	9 (3/8")
Filter	width x length (mm.)	97 x 110
Installation plate	dimensions (mm)	W:394 D:154 H:100

Installation

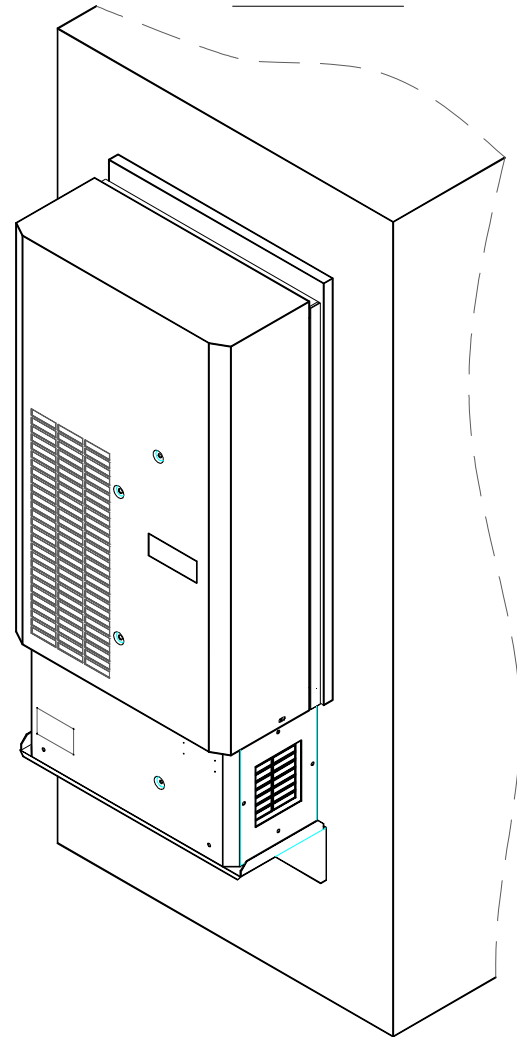


E050-V2


(TOP VIEW)

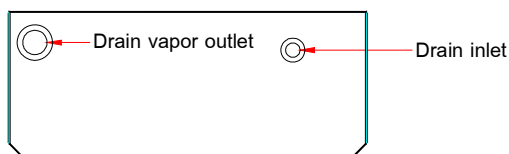


376
(FRONT VIEW)

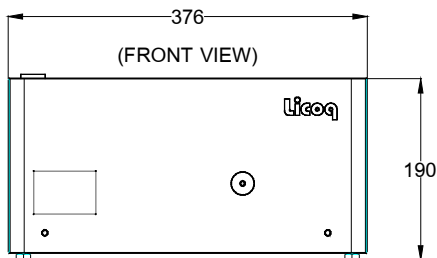

(BOTTOM VIEW)

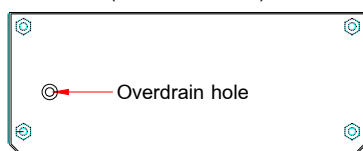

153
(SIDE VIEW)



(REAR VIEW)

